© 2023 York Flashings

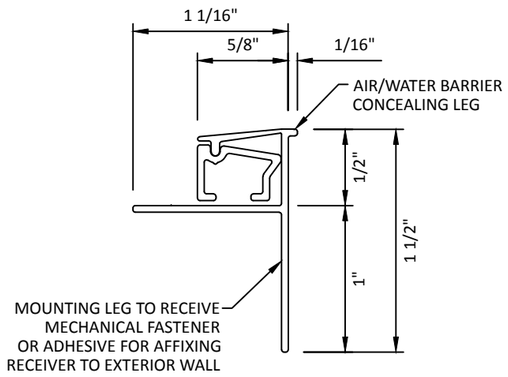

AIRSILL™ TYPE A

**THE AIR/WATER BARRIER CONCEALING LEG FACILITATES DIRECT CONNECTION OF FENESTRATION PERIMETER SEAL AND THE AIR/WATER BARRIER.*

**RECOMMENDED FOR SILL, JAMB AND HEAD FENESTRATION OPENING CONDITIONS.*

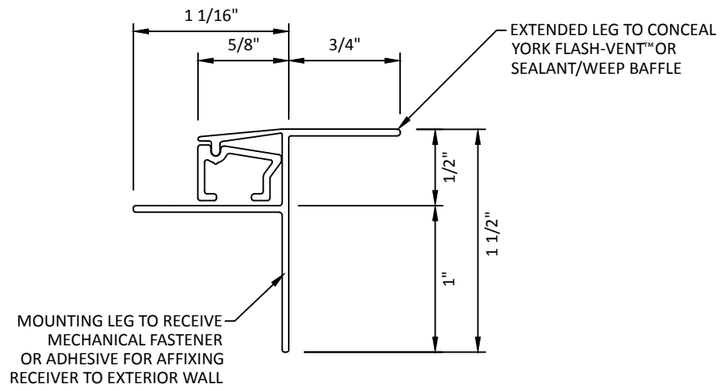

AIRSILL™ TYPE B

**AIRSILL™ TYPE B IS AN OPTIONAL RECEIVER SHAPE FOR SILL CONDITIONS IN LIEU OF AIRSILL™ TYPE A THAT FACILITATES THE USE OF YORK FLASH-VENT™ OR SEALANT BED WITH WEEP BAFFLES TO ACCOMMODATE MOISTURE DRAINAGE OUT OF THE FENESTRATION OPENING; THE EXTENDED LEG ALSO SERVES TO RECEIVE THE FENESTRATION PERIMETER SEAL.*

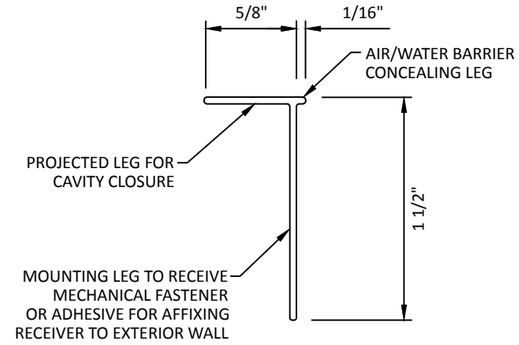

AIRSILL™ TYPE D

**AIRSILL™ TYPE D IS IDEAL FOR A CAVITY CLOSURE BETWEEN CLADDING AND BACK-UP WALL THAT FACILITATES DIRECT CONNECTION OF FENESTRATION PERIMETER SEAL AND THE AIR/WATER BARRIER.*

**RECOMMENDED FOR SILL, JAMB AND HEAD FENESTRATION OPENING CONDITIONS.*

YORK Flashings™

AS A MANUFACTURER OF CONSTRUCTION MATERIALS,
YORK MANUFACTURING, DOES NOT ASSUME RESPONSIBILITY FOR ERRORS
IN DESIGN OR ENGINEERING. ARCHITECT OR OWNERS REPRESENTATIVE
MUST VERIFY SUITABILITY OF DETAILS.

AIRSILL™ PROFILES | AirSill™ Flashing Receiver