



Product Submittal


Multi-Flash™ 500 SA

Description

Multi-Flash™500 SA has been designed with a flexible 3oz, 5oz, or 7oz., sheet of copper laminated on one side with a polymer fabric, butyl adhesive, and a siliconized release liner.

Description & Benefits:

- Non-staining
- Best in class puncture resistance for copper
- Meets all performance specifications for asphaltic copper fabric flashing
- Mold resistant: passes ASTM D3273
- Fire resistant: passes ASTM E84, Class A
- 20-year warranty
- Compatible with:
 - Air barriers
 - Spray Polyurethane Foam
 - Cavity wall insulations
 - Construction sealants

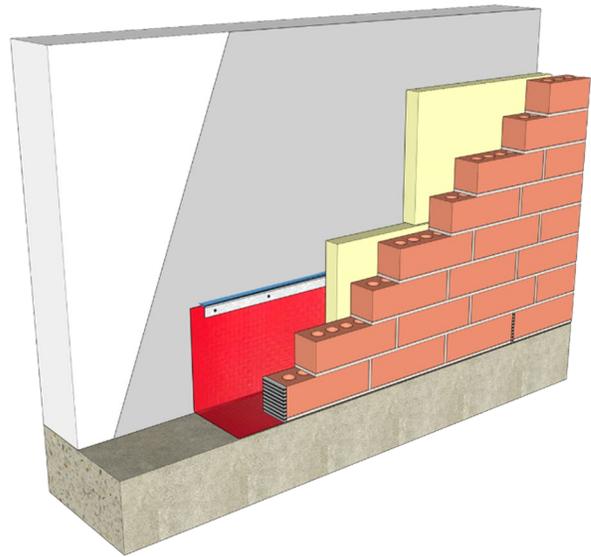

Copper:

- Made of 90% recycled content

3oz 5oz 7oz

Accessories:

- | | |
|--|--|
| <input type="checkbox"/> UniverSeal US-100 Sealant | <input type="checkbox"/> York 304 SA Self-Adhering Tape |
| <input type="checkbox"/> T-96 Termination Bar | <input type="checkbox"/> Stainless Steel Drip Edge |
| <input type="checkbox"/> SS Termination Bar | <input type="checkbox"/> Drip Edge Stainless Steel Outside Corners |
| <input type="checkbox"/> Stainless Steel Outside Corners | <input type="checkbox"/> Drip Edge Stainless Steel Inside Corners |
| <input type="checkbox"/> Stainless Steel Inside Corners | <input type="checkbox"/> Stainless Steel Weep Vents |
| <input type="checkbox"/> Stainless Steel End Dams | <input type="checkbox"/> Weep-Net™ |
| | <input type="checkbox"/> Weep-Armor™ |

Submittal Date: _____

Bid Date: _____

Project: _____

Project Address: _____

Contractor: _____ Phone: _____ E-mail: _____

Notes: _____

Architectural Firm: _____ Project Architect: _____

- Approved
- Not Approved

Remarks: _____