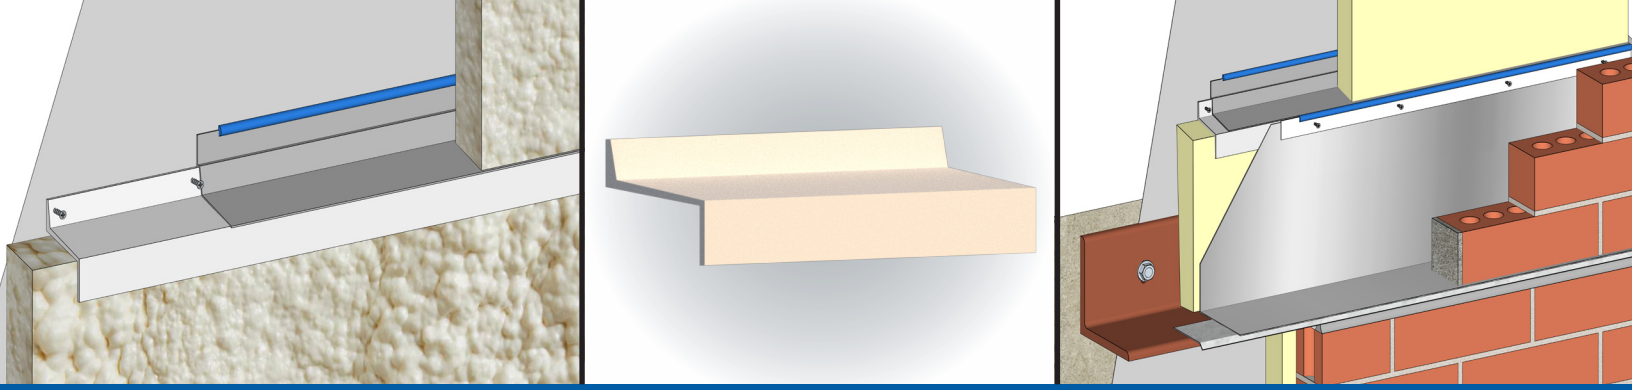

Termination Bar Extender

Key Properties

- The flashing extender reduces ***thermal bridging***
- Simplifies complex through-wall flashing (TWF) details at corners and end dams when the flashing is installed through the insulation
- 10 degree slope to promote drainage
- Allows for insulation (listed below) to be installed before the flashing system is installed
  - SPF spray foam
  - Polyisocyanurate foam panels
  - Extruded polystyrene (XPS)
  - Mineral wool
  - Wood fiber insulation
- One person installation
- The **Termination Bar Extender** is not to be used for structural purposes
- System components: **Termination Bar Extender**, MaxSeal, flat termination bar, US-100, and choice of TWF

Description

York's Termination Bar Extender is a thermally broken flashing extender that takes the complex geometry out of flashing, which simplifies the flashing installation.

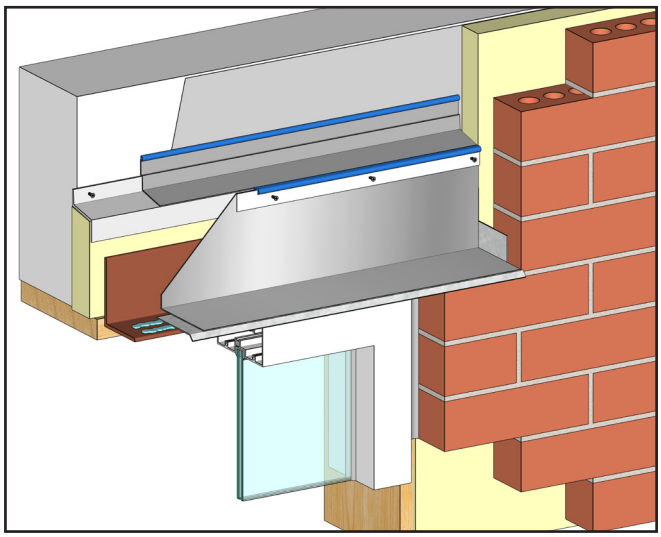

2" Extender

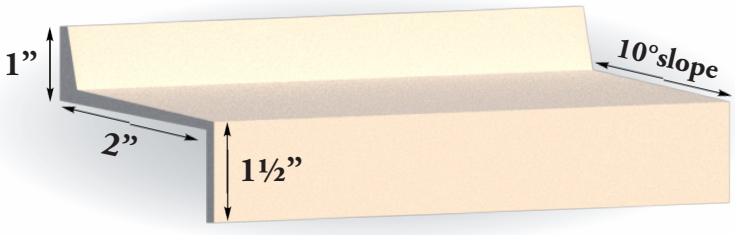

3" Extender

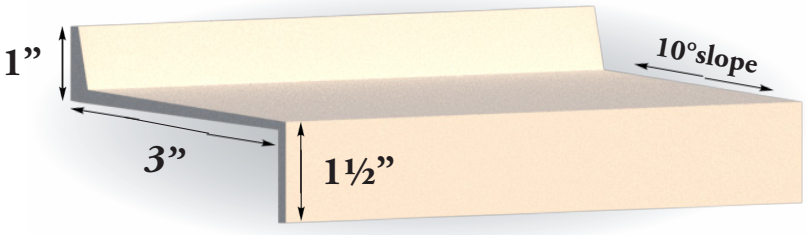

Available in:
8' sections
80' per box (10 pieces)

Visit www.yorkflashings.com for complete installation instructions, details & more.