


INSTALLATION INSTRUCTIONS:

1. THE SUBSTRATE, MEMBRANE FACER, AND/OR APPROVED ACCESSORY RECEIVING THE EDGE SEALANT SHALL BE CLEAN, DRY, AND FREE OF DUST, DIRT, DEBRIS, FROST, OIL, AND OTHER CONTAMINANTS. CLEAN THE SURFACE WITH A LINT-FREE CLOTH SATURATED WITH UNDILUTED DENATURED ALCOHOL. ALLOW THE ALCOHOL TO FLASH OFF AND EVAPORATE COMPLETELY BEFORE APPLYING YORK UNIVERSEAL US-100 EDGE SEALANT.
2. APPLY YORK UNIVERSEAL US-100 EDGE SEALANT AT A MINIMUM WET-FILM THICKNESS OF 30 MILS. A PROPERLY INSTALLED EDGE SEALANT SHALL PROVIDE A MINIMUM 1/2-INCH BOND WIDTH ONTO BOTH THE STAINLESS-STEEL FACER AND THE ADJACENT SUBSTRATE, MEMBRANE, DRIP EDGE, OR APPROVED ACCESSORY FOR A MINIMUM OF 1" TOTAL EDGE COVERAGE.
3. FOR EDGES EXPOSED TO HYDROSTATIC PRESSURE OR STANDING-WATER CONDITIONS, APPLY THE SEALANT AT A MINIMUM WET-FILM THICKNESS OF 60 MILS.
4. ALLOW THE SEALANT TO SET FOR APPROXIMATELY 25 MINUTES TO 1 HOUR, DEPENDING ON TEMPERATURE AND HUMIDITY CONDITIONS, BEFORE INSTALLING CLADDINGS, MASONRY, OR OTHER MATERIALS THAT COULD DISTURB THE FLASHING MEMBRANE.
5. REACH OUT TO YORK FLASHINGS' TECHNICAL TEAM AT INFO@YORKMFG.COM OR 800-551-2828 FOR COMPATIBILITY REVIEW OR PRODUCT DETAILING RECOMMENDATIONS.



KEY	
US-100 SEALANT	

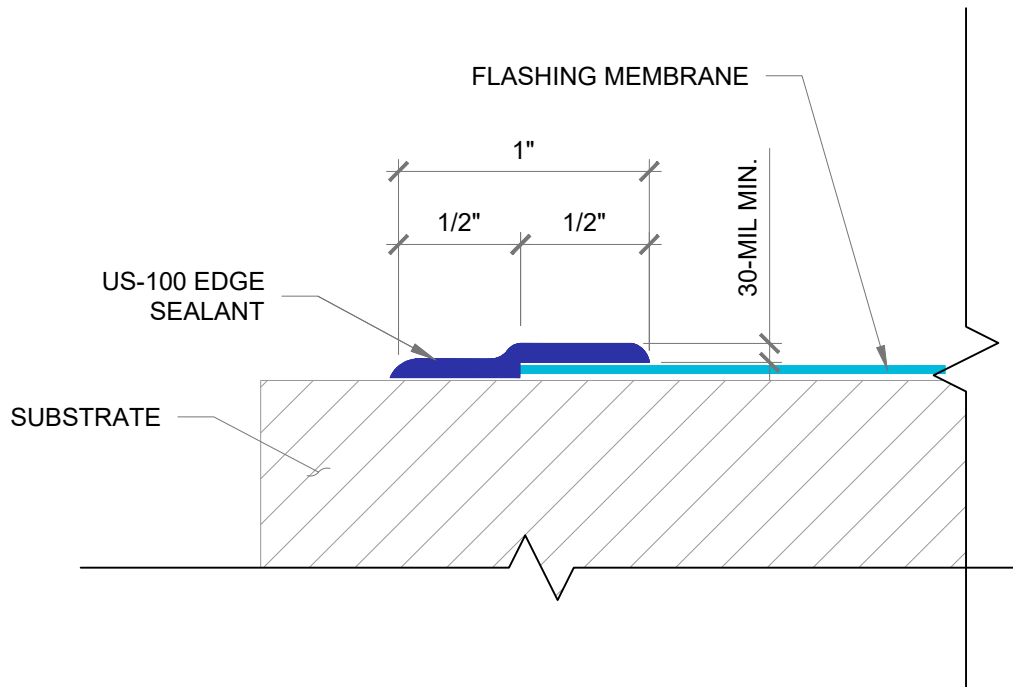

EDGE SEALANT TERMINATION YORK US-100

NTS

Design team is responsible for design application of York Flashings products and accessories. All products should be used in compliance with local building codes and international codes or standards. York provides this detail as guidance only and accepts no liability for the use or duplication of this detail. The design team is responsible for the design and, at their discretion, should determine if the recommended product application is suited for the project and performance desired. This detail is subject to modification at the manufacturer's discretion without notice. For the most recent version, please visit www.yorkflashings.com.

EDGE SEALANT TERMINATION YORK UNIVERSEAL US-100



DRAWN BY:
M. Payne

DATE:
7/23/2026

DRAWING NAME:
US100-EDGESEALANT