



Product Submittal

York-Seal

Description


York-Seal Flashing is a 40 mil. Thick membrane consisting of a self-adhering rubberized asphalt laminated to a high density cross laminated polyethylene film. A siliconized release liner prevents the product from sticking to itself in the roll.

Description & Benefits:

- Waterproof Barrier at flashing areas to prevent wall assembly leaks
- Self-adhesive nature allows for easy installation on concrete, masonry, gypsum, steel and wood substrates.

Uses:

- Through-Wall Flashing
- Curtain Wall Perimeter Flashing
- Jamb Closer Flashing
- Roof to Parapet Flashing
- Repair Tape for flashing, air barriers, etc.
- Transition Membrane (air barriers, roofing, waterproofing)

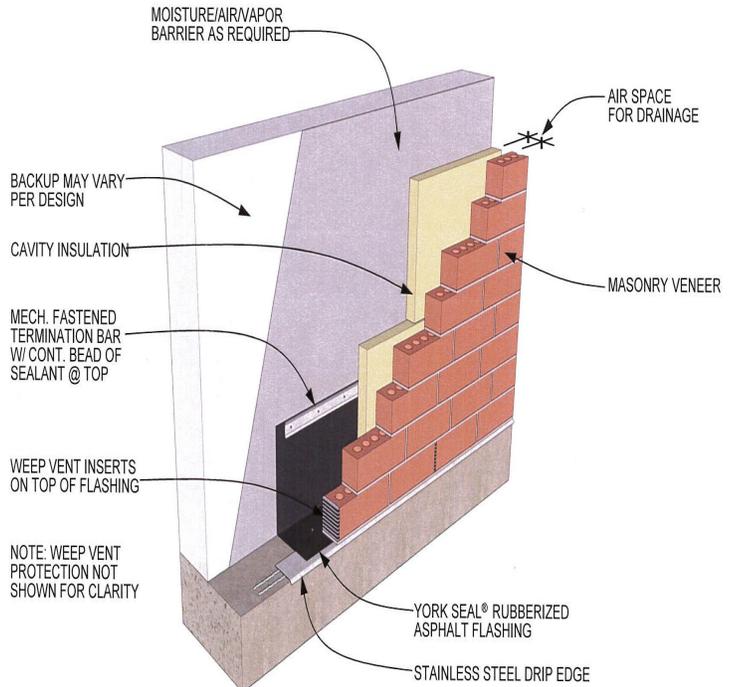

Accessories:

- | | |
|--|--|
| <input type="checkbox"/> UniverSeal US-100 Sealant | <input type="checkbox"/> York 304 SA Self-Adhering Tape |
| <input type="checkbox"/> T-96 Termination Bar | <input type="checkbox"/> Stainless Steel Drip Edge |
| <input type="checkbox"/> SS Termination Bar | <input type="checkbox"/> Drip Edge Stainless Steel Outside Corners |
| <input type="checkbox"/> Stainless Steel Outside Corners | <input type="checkbox"/> Drip Edge Stainless Steel Inside Corners |
| <input type="checkbox"/> Stainless Steel Inside Corners | <input type="checkbox"/> Stainless Steel Weep Vents |
| <input type="checkbox"/> Stainless Steel End Dams | <input type="checkbox"/> Weep-Net™ |
| | <input type="checkbox"/> Weep-Armor™ |

Submittal Date: _____ Bid Date: _____

Project: _____

Project Address: _____

Contractor: _____ Phone: _____ E-mail: _____

Notes: _____

Architectural Firm: _____ Project Architect: _____

Approved

Not Approved

Remarks: _____
